

4" COMMERCIAL LAMP POSTS

Lamp Posts & Accessories

DIRECT BURIAL

Fits most 3" Post Top Fixtures
Includes Inlet Hole



SAFETY NOTES

All surface mount posts are supplied with welded mounting bases.

Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

See Suggested
Burial Depth on
page 52

4" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590-10'	BK-Black	HH*
4592-12'	BZ-Bronze	
4594-14'	WH-White	


4" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590F-10'	BK-Black	HH*
4592F-12'	BZ-Bronze	
4594F-14'	WH-White	

SURFACE MOUNTED

Welded Flange & 3" Tenon with Optional Decorative Cover. Anchor bolts included.
Fits most 3" Post Top Fixtures

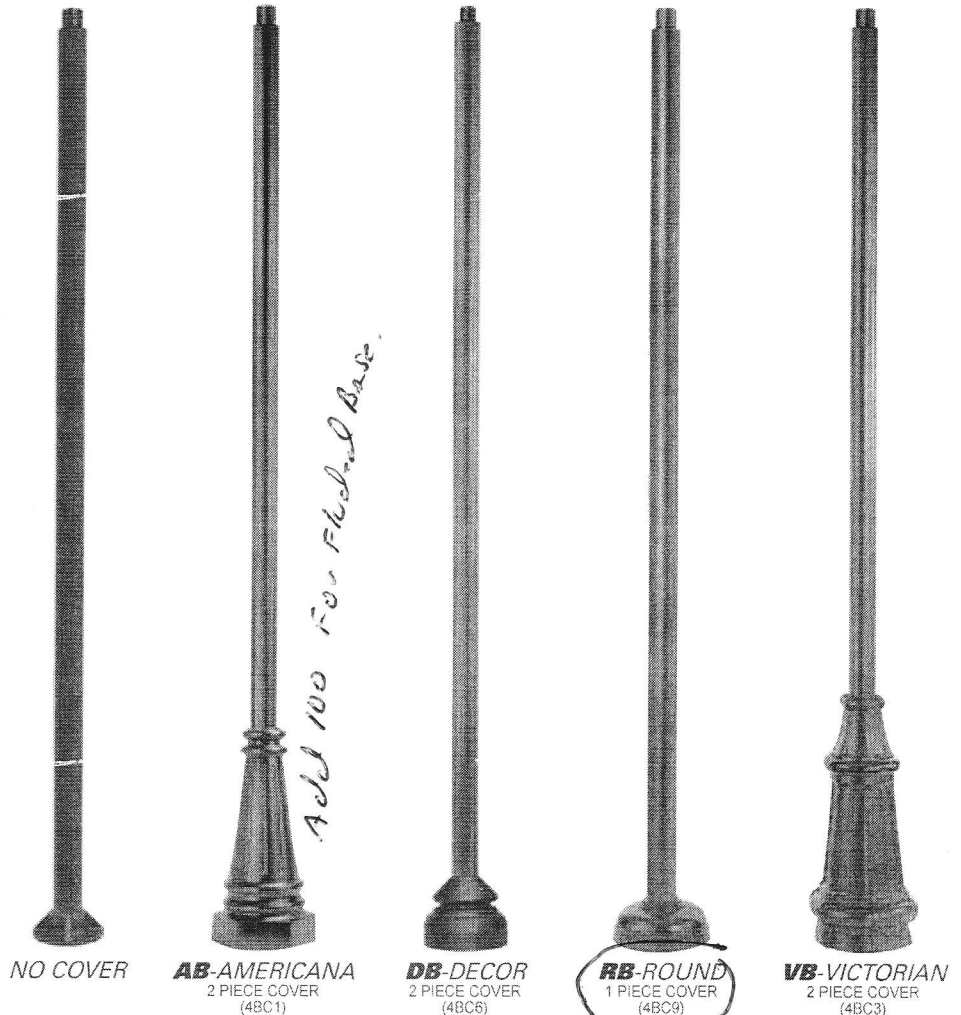

4" ROUND ALUMINUM


.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
4688-8'	No Cover	BK-Black	HH*
4690-10'	AB-American Base	BZ-Bronze	
4692-12'	DB-Decor Base	WH-White	
4694-14'	HX-Hexagon Base		
	RB-Round Cover		
	VB-Victorian Base		

4" FLUTED ALUMINUM

.125 Wall Thickness


ITEM #	BASE TYPE	COLOR	OPTION
4688F-8'	No Cover	BK-Black	HH*
4690F-10'	AB-American Base	BZ-Bronze	
4692F-12'	DB-Decor Base	WH-White	
4694F-14'	HX-Hexagon Base		
	RB-Round Cover		
	VB-Victorian Base		



Round F-Fluted



4" Round 4" Fluted



Bolt Circle Pattern
For 4" Posts
Anchor Bolt 3/4" x 18"

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 4592, 4594, 4592F, 4594F, 4690, 4692, 4694, 4690F, 4692F, and 4694F include Hand Hole unless otherwise specified.


WAVE

LIGHTING

CONTEMPORARY SERIES

COMMERCIAL
POST LIGHTING

NEW

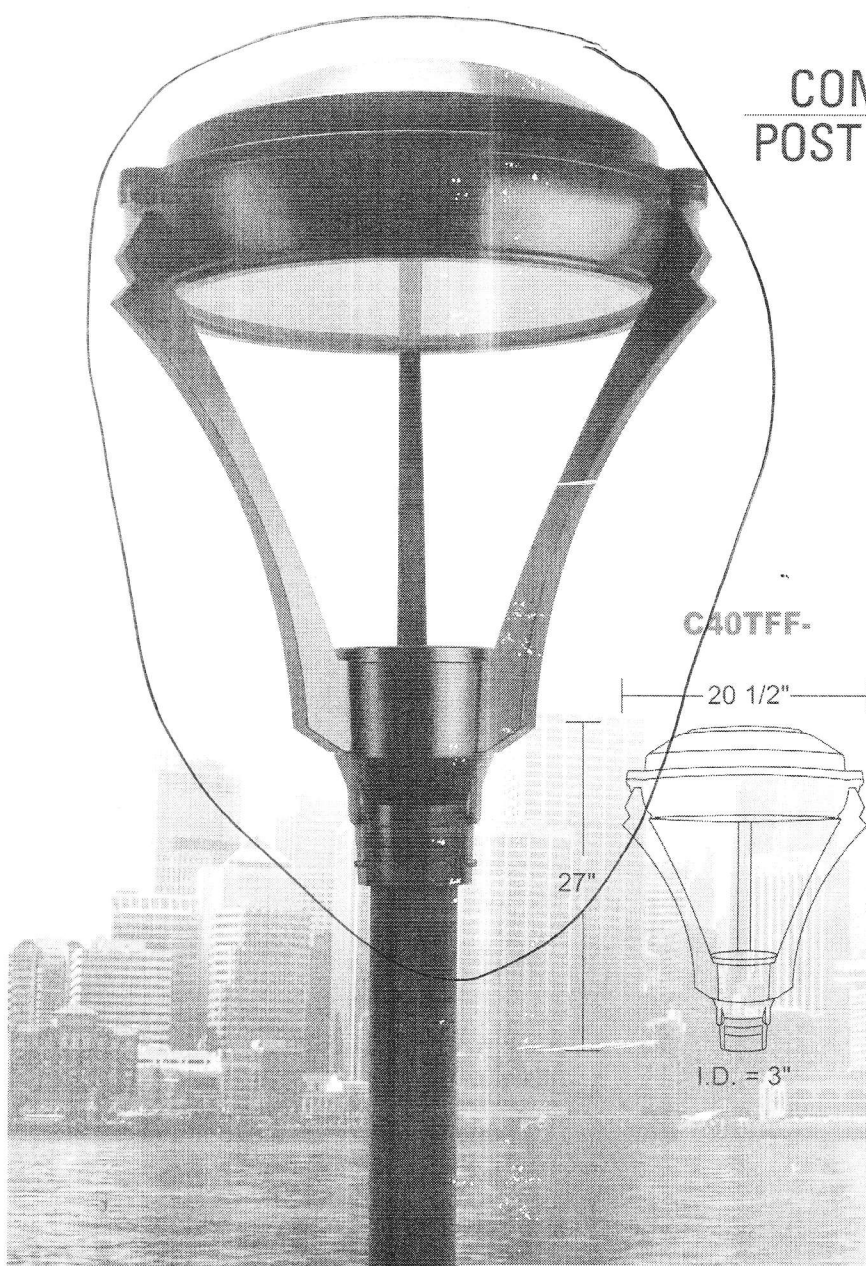


C40TFF-

20 1/2"

27"

I.D. = 3"

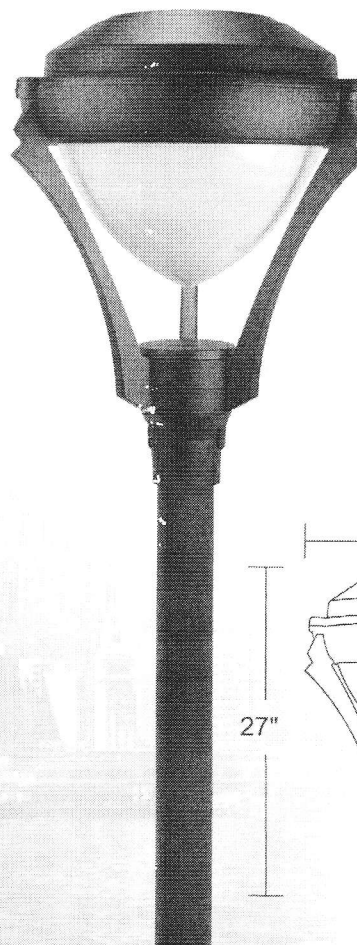

C40TL-

20 1/2"

27"

I.D. = 3"

LED
COMMERCIAL
system

GUIDE: C40TL-L40C-BK



ITEM #	LENS	LIGHT SOURCE		COLOR
C40T	ACRYLIC	LED LIGHT SOURCE		<u>BK-Black</u> BZ-Bronze WH-White
	L-Opal Drop Lens	120-277V LED	CCT	
	FF-Frost Flat Lens	L40-40W 4000lm	C-4K (Standard)	
		L60-60W 6000lm	W-3K (Special Order)	
			B-5K (Special Order)	

* Integral surge suppression in LED models.

PHONE 877.870.WAVE (9283) • FAX 330.630.1994 • WWW.WAVELIGHTING.COM